



This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Dynasylan® is a registered trademark of Evonik Industries or one of its subsidiaries.


EVONIK RESOURCE EFFICIENCY GMBH

Business Line Silanes
Rodenbacher Chaussee 4
63457 Hanau
Germany
www.dynasylan.com

RE-162-OCT17TMC



CATIONIC SILANES

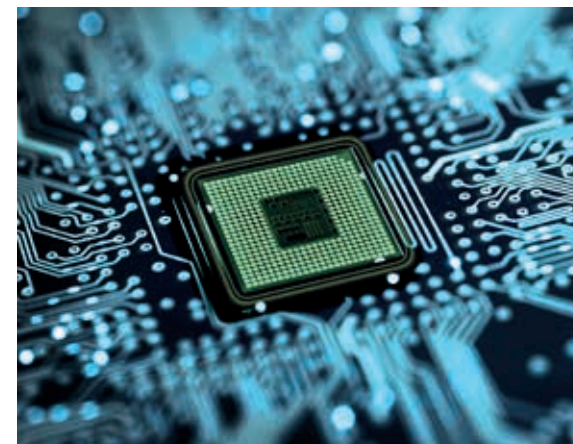


Dynasylan®


 **EVONIK**
POWER TO CREATE

 **EVONIK**
POWER TO CREATE

New cationic silanes with extra benefits!


Did you know...

...that Evonik is the world's leading silane manufacturer with global production and R&D?
 With more than 80 years of experience, we are the No. 1 silicon chemistry experts.

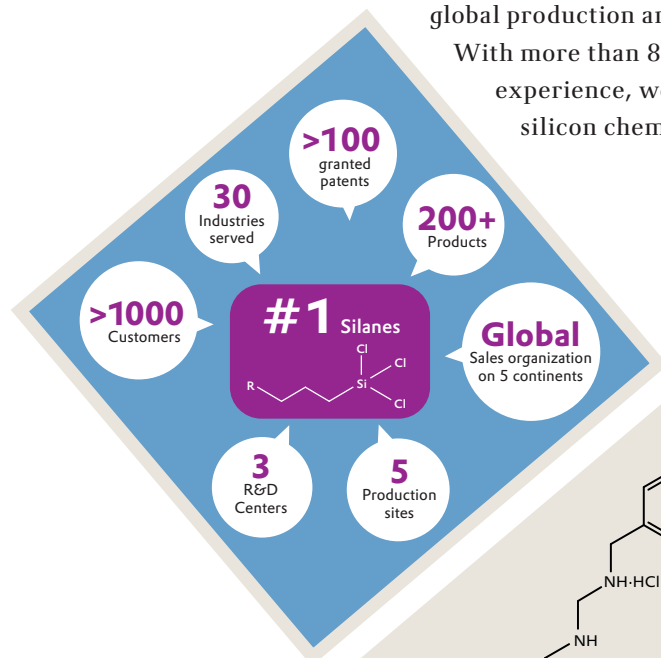

Are you looking for a solution for your high temperature applications?

Our Dynasytan® 1175, VPS 1175 b and Dynasytan® 1178 are high temperature stable silanes that reduce failure in PCB laminates.


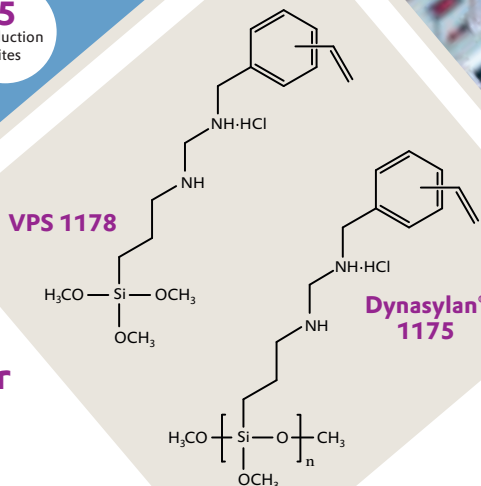


Why Dynasytan®?

Controlled reactivity thanks to high monomer concentration.
 Low concentration of undesirable impurities.
 Excellent heat resistance determined by TG analysis.
 Transparent liquid: turbidity 3TUF (fresh after 1 h at pH 3.5).
 Hydrolysis reaction in the pH range 3 – 4 with acetic acid.
 Dynasytan® gives you the competitive advantage!

Customer focused technical support?

Yes we do! World class analytical capabilities with surface analysis via single fiber tensiometer, SEM and drop shape testing. Product tailoring and extra analyses of our products as well as application tests on substrates are part of our outstanding technical service.

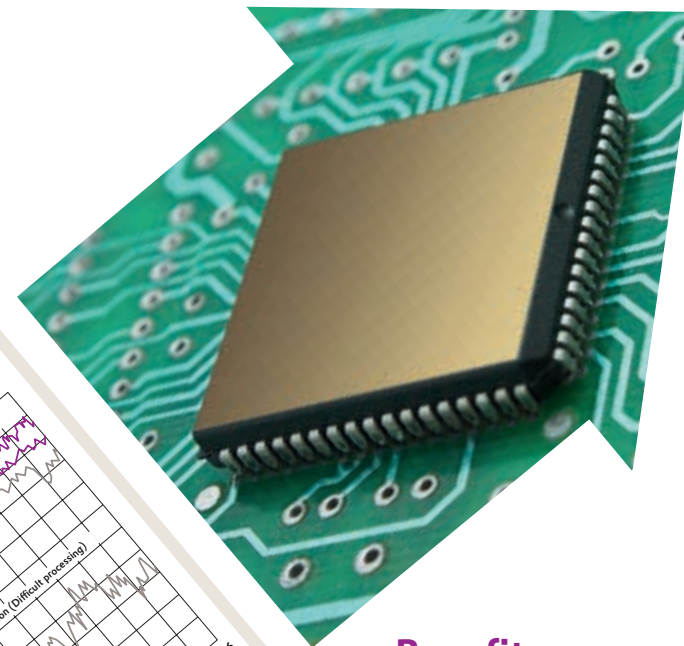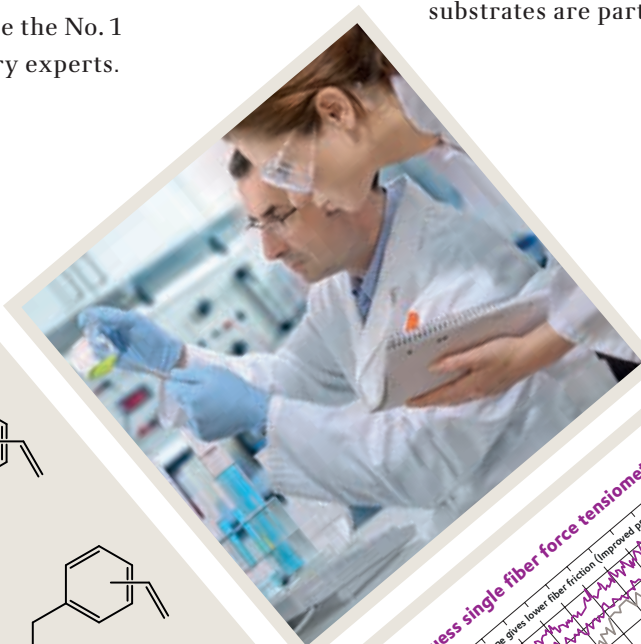

Benefits, benefits, benefits!

Evonik's "turn-key" silanes provide a homogeneous film on glass fiber surfaces. With a wide range of products, packaging customization, and globally established supply chains we make sure to meet our customer's needs.

