

Solution Case Study

Formulate transparent SMP-based adhesives & sealants with reduced yellowing over time and increased mechanical properties

Key benefits

- Transparent SMP-based
- Improved mechanical properties compared to market standard
- Reduced yellowing during storage
- Reduced yellowing during service lifetime

Applications

- Construction
- Transportation
- DIY
- Industrial assembly

The challenge

Many formulators are facing significant challenges when formulating **transparent SMP-based (silane modified polymers) adhesives and sealants**. Next to questions around transparency or rheology (where AEROSIL® fumed silicas play an important role), the **subsequent creeping of yellowing** of such products during storage or even service lifetime are the key for a successful market entry.

The solution


Dynasytan® 1146 and **Dynasytan® SIVO 203** are the most suitable organofunctional silanes that provide desired excellent properties (adhesion, mechanical properties, low yellowing) over a wide range of individual applications (construction, transportation, do-it-yourself, industrial assembly ...).



Formulate transparent SMP-based adhesives & sealants with reduced yellowing over time and increased mechanical properties.

Improved mechanical properties: up to 75% tensile strength increase!


Both tailor-made multifunctional silane systems have been tested in a lab study compared to the market standard Dynasytan® AMMO, and led to strongly improved mechanical properties of the corresponding SMP-based sealants (Figure 1, AMMO = 100 as an index).

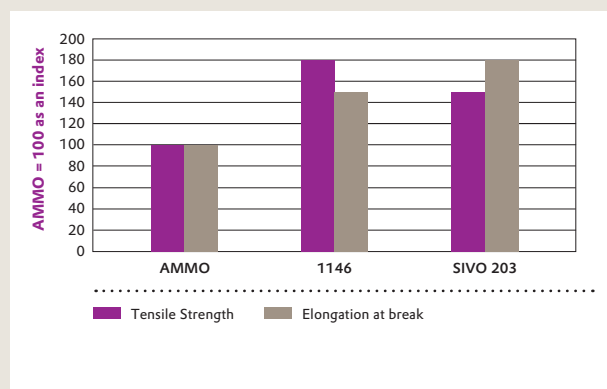

Mechanical properties of cured MS Polymer™ sealants

Significant yellowing reduction: no yellowing during storage nor service lifetime

As shown below, the visual evaluation of said sealants indicated Dynasytan® SIVO 203 as best silane solution with a look on color stability while Dynasytan® 1146 was 2nd best (Figure 2). Dynasytan® AMMO gave proper specimen while (the old standard) Dynasytan® DAMO-T failed.

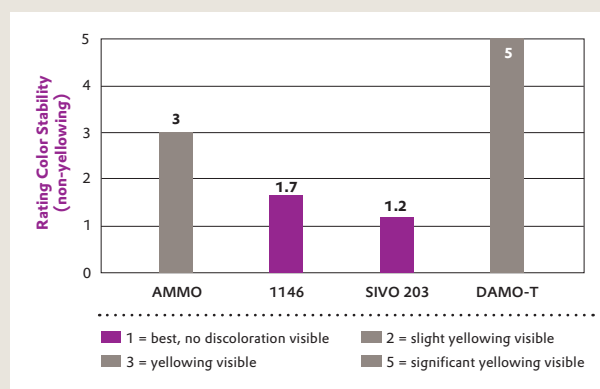

Last but not least, Dynasytan® SIVO 203—and especially Dynasytan® 1146—offer real opportunities to avoid labeling.

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Dynasytan® is a registered trademark of Evonik Industries or one of its subsidiaries.

EVONIK RESOURCE EFFICIENCY GMBH

Business Line Silanes
 Rodenbacher Chaussee 4
 63457 Hanau
 Germany
dynasytan@evonik.com
www.dynasytan.com

