

Solution Case Study

# Formulate Highly Flexible and Durable SMP-Based Adhesives and Sealants thanks to Dynasytan® 1189 Aminosilane

**Aminosilane: Dynasytan® 1189**

**Applications**

Adhesives and sealants in Silane Modified Polyurethane/Polyether (SMP)

**Markets**

Construction

**Key benefits**

- High flexibility for adhesives and sealants
- Improved moisture resistance
- Enhanced chemical resistance


**The challenge**

Bonding dissimilar and/or flexible substrates is always challenging for end users. They need an adhesive solution which exhibits high flexibility and long term performance.

**The solution**


Dynasytan® 1189 is an accompanied adhesion promoter for moisture curable SMP-based adhesives and sealants. When exposed to moisture and incorporated into the final siloxane network, Dynasytan® 1189 exhibits specifically high flexibilities. Further important side effects of formulating Dynasytan® 1189 are better chemical and moisture resistance of the finished products.

Moreover, Dynasytan® 1189 is used to functionalize-polymers with amino-reactive groups such as isocyanate pre-polymers. This functionalization results in new and environmentally friendly moisture curable binders.

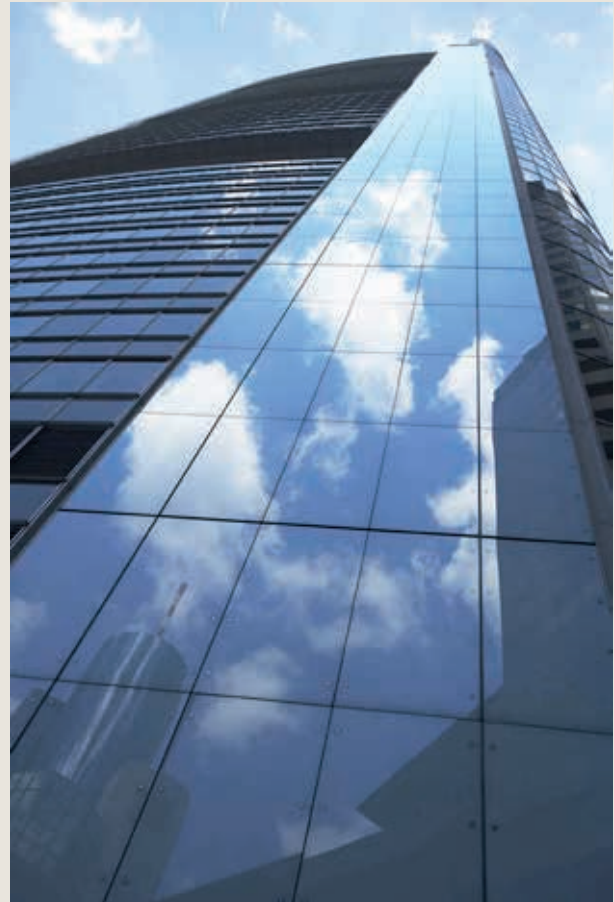


### High flexibility for adhesives and sealants

As shown in the graph below, a STPU sealant formulated with Dynasylan® 1189 exhibits a low modulus (100 %) indicating that the sealant is not rigid:

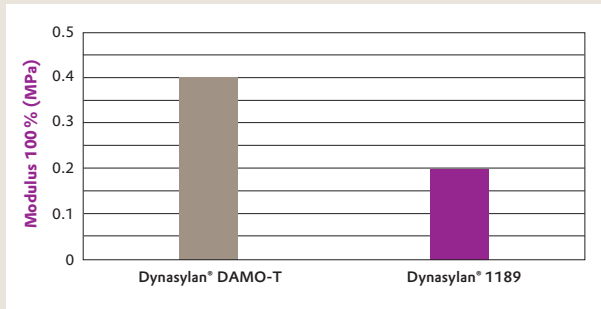

Modulus (100 %) with Dynasylan® adhesion promoters in cured STPU-sealant

In addition, thanks to Dynasylan® 1189, the final STPU sealant showed a high elongation at break highlighting the deformation capacity of the sealant:

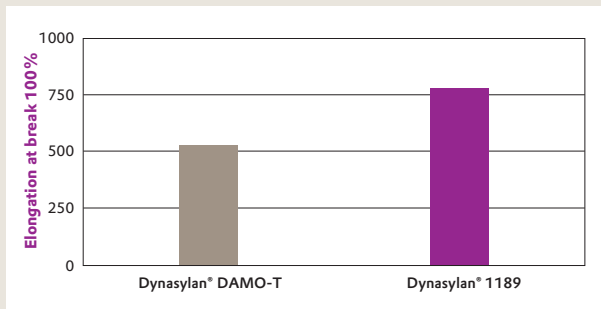


Elongation at break with Dynasylan® adhesion promoter in cured STPU sealant

### Improved moisture resistance

Dynasylan® 1189 enables formulators to keep adhesives or sealants overall performance (adhesion and other) even when they are exposed to a humid environment.


As an example, Dynasylan® 1189 helps to improve the shear resistance of a STPU sealant even when a joint is immersed 6 days in water:

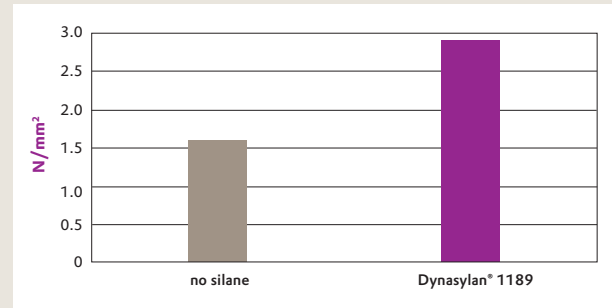

Lap shear strength of an STPU sealant after 6 days aging in water at RT (Test performed on aluminum at 23 °C)

### Enhanced chemical resistance

Not only when exposed to humid environments but also when in contact with harsh chemicals, adhesives or sealants formulated with Dynasylan® 1189 maintain their performance. When used in STPU sealants, Dynasylan® 1189 helps to improve the shear resistance even when joints are immersed 22 days in Isopropanol:

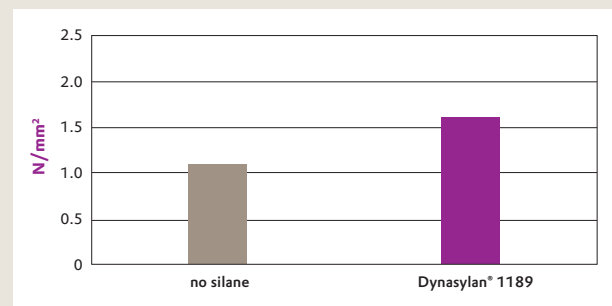

Lap shear strength of an STPU sealant after 22 days aging in Isopropanol (Test performed on aluminum)

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

Dynasylan® is a registered trademark of Evonik Industries AG or one of its subsidiaries.

**Evonik Operations GmbH**  
Business Line Silanes  
Rodenbacher Chaussee 4  
63457 Hanau  
Germany  
[dynasylan@evonik.com](mailto:dynasylan@evonik.com)  
[www.dynasylan.com](http://www.dynasylan.com)

